



Mounting



Specification



SmartScan Configurations



Find out more at www.thorlux.com/smartscan

LED Characteristics

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	80K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	91%
REPLACEABLE	YES
POWER FACTOR	>0.9
LL/CW	146.0

ENERGY EFFICIENCY CLASSIFICATION **B**

For LED characteristics explanation see www.solite-europe.com/led-guide

High performance, compact, rear access luminaire with full walk-on capability. Designed to flush-fit (top and bottom) into cut aperture composite load-bearing ceiling panels. IP65 (front) / IP54 (rear) ensures the ceiling integrity is maintained at all times, even when the cover is removed.

Applications

- Clean and sterile environments up to FS209E class 1000, ISO 14644 class 6
- For installation in to walk-on ceilings where access for maintenance is via the ceiling void
- Pharmaceutical production
- Laboratories
- Electronics manufacturing
- Semiconductor manufacturing
- Food preparation manufacturing

Construction

- Zinc plated steel body, frame and lid
- Heavy duty folded steel construction allows full walk on capability
- Polyester powder coated body and frame
- Polycarbonate fire-retardant diffuser, TP(a)
- White EDPM closed cell gaskets

Finish

- RAL9010
- Satin opal diffuser

Emergency Options, 3 hour integral ***

- Standard, Self-test, DALI or SmartScan

*** Central battery, contact sales

Feature

- Fixed output, 4000K, CRI80 as standard
- Conforms to FS209E class 1000, ISO14644 class 6 standard
- Full walk-on capability. Tested to 2.5kN/m² and forms an integrated part of the working platform
- Flush-fits in to composite load-bearing ceiling panels of 60mm thickness as standard, up to 200mm to special order
- IP65 (front) / IP54 (rear)
- LUX Guard, LED protection
- Removable LED platform for improved sustainability and longer life cycle

Options

- Special RAL colour **
- Anti-bacterial paint **
- 140W high output (emergency in remote box)**
- 3000K or 6500K LED light engine **
- CRI90 LED light engine **
- Stainless steel frame **
- Deglaring lens: LG7 compliant, providing <1500cd/m². Replace 'S' suffix with: '+LG7P' LG7+clear polycarbonate / '+LG7G' LG7+toughened glass
- Toughened glass front panel: For applications where corrosive cleaning agents may be applied. Glass is supplied in addition to the satin polycarbonate panel. Replace 'S' suffix with 'TGS'

** Available on request, contact sales

Controls Options

- DALI or SmartScan

Range

LED	CAT. NO.	CEILING THICKNESS	NOMINAL SIZE	CUT APERTURE	APPROX. kg
26W	EVORA3226WLED4S	60mm [■]	770mm x 440mm	740mm x 410mm	13.8
35W	EVORA3235WLED4S				
47W	EVORA3247WLED4S				
54W	EVORA3254WLED4S				
70W	EVORA3270WLED4S				
84W	EVORA3284WLED4S				

CONTROLS OPTIONS - suffix catalogue number with:


DALI-DIM - DALI dimmable / **SSCAN** - SmartScan e.g. **EVORA3254WLED4S+DALI-DIM**

EMERGENCY OPTIONS - suffix catalogue number with:

EM - Standard 3 hour integral / **EM-ST** - Emergency Self-test 3 hour integral / **DALI-EM** - DALI 3 hour integral / **SSCAN-EM** - SmartScan 3 hour integral e.g. **EVORA3254WLED4S+EM**


[■] **CEILING THICKNESS** - Standard is 60mm. Please note the thickness of the ceiling panel as a suffix to the product code e.g. 54W option with 150mm ceiling: **EVORA3254WLED4S+150MM**

Dimensions

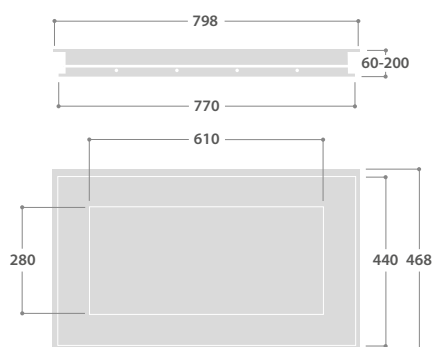


Mounting Arrangement

Load bearing ceiling panel 60mm up to 200mm

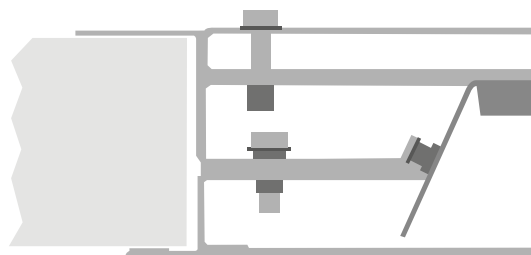

NOTE: The Evo RA integrates in to the ceiling panel to maintain the working platform in the void space.

Photometric Guide



LED

Luminaire Lumen Output

26W = 4137lm

35W = 5570lm

47W = 7480lm

54W = 8594lm

70W = 10617lm

84W = 12740lm

Emergency = 509lm*

[▲] **NOTE:** Emergency lumen output does not change according to wattage.
(Lumen output for central battery systems will vary according to the installation)