



## RANGE

	LED	3000K VERSION	4000K VERSION	LENGTH	APPROX. kg	CIRCUIT
STANDARD	35W	<b>SZ 19341</b>	<b>SZ 19343</b>	720mm	7.0	L/A
	72W	<b>SZ 19342</b>	<b>SZ 19344</b>	1170mm	13.0	L/A

**CIRCUIT TYPE** - suffix catalogue number with:

**L** - non-dimming (LED) / **A** - dimming (DALI) e.g. **SZ 19341L** etc.

**EMERGENCY VERSION** - prefix catalogue number with:


**E** - Emergency e.g. **ESZ 19341L** etc.

Add 0.3kg to weights listed.

**INTEGRAL NIGHT LIGHT VERSION** - suffix catalogue number with:

**N** e.g. **SZ 19341LN** etc.

## DIMENSIONS

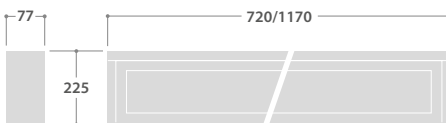

NOTE: Supply entries and fixing points to be drilled on site  
IP65 integrity must be maintained

## LIGATURE-RESISTANT, IMPACT-RESISTANT LED LUMINAIRES



### SPECIFICATION

- 1.2mm steel body finished full polyester powder coated textured white
- 4mm steel front cover frame retained with tamper-resistant captive fixings
- 10mm TP(a) fire-retardant polycarbonate diffuser.
- Control module options available providing maintained illuminance with selectable light levels (high brightness/ day/night light)
- Ministry of Justice Estates approved HMPPS STD/E/SPEC 022 safer cells
- High impact strength - IK10++
- Reduced luminaire profile and footprint with fewer cover fixings – reducing ligature risks.
- Manufactured in the UK
- 5 year Warranty
- Fitted with 3000K or 4000K LEDs

## LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	3000K/4000K
RATED LIFE (HOURS)	88K - L70/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>85%
REPLACEABLE	YES
POWER FACTOR	>0.95
LL/CW	76.1

For LED characteristics explanation see  
[www.solite-europe.com/led-guide](http://www.solite-europe.com/led-guide)


# SHIELD SURFACE



## ACCESSORIES

DESCRIPTION	CAT. No
T30 pin Torx bit ( <i>Suitable for magnetic bit holder</i> )	<b>KEY 16977</b>

## PHOTOMETRIC GUIDE



Luminaire Lumen Output  
35W = 3120lm  
72W = 6240lm