

Rear access luminaire with full walk-on capability. Designed to flush-fit (top and bottom) in to cut aperture composite load-bearing ceiling panels. IP65 (front)/IP54 (rear) ensures the ceiling integrity is maintained at all times, even when the cover is removed.



Pharmacies



Laboratories

FEATURES



Particle PPM



Walk On



LED




IP54 Above
IP65 Below



Not suitable
for modular
"T" ceilings



UKCA



TP(a)
Diffuser



CE Mark



Accessible
from above



Cut Aperture

FEATURES

- Fixed output, 4000K, CRI80 as standard
- Conforms to FS209E class 1000, ISO 14644 class 6 standard
- Full walk-on capability. Tested to 2.5kN/m² and forms an integrated part of the working platform
- Flush-fit in to composite load-bearing ceiling panels of 60mm thickness as standard, up to 200mm to special order
- IP65 (front)/ IP54 (rear)
- LUX Guard, LED protection
- Removable LED platform for improved sustainability and longer life cycle

EMERGENCY OPTIONS, 3 HOUR INTEGRAL

- Standard, Self-test, DALI or SmartScan
- *** Central battery, contact sales

FINISHES

White RAL9010

Glass and satin
opal diffuser



CONSTRUCTION

- Zinc plated steel body
- Chamfered 55mm aluminium diffuser frame, with welded and finished corners
- Polyester powder coated body and frame
- Polycarbonate fire-retardant diffuser, TP(a)
- White EPDM closed cell gaskets

EXTRA FEATURES


- Fixed output, 4000K, CRI80 as standard
- Conforms to FS209E class 1000, ISO14644 class 6 standard
- IP65 (front) / IP54 (rear)
- LUX Guard, LED protection
- Removable LED platform for improved sustainability and longer life cycle

OPTIONS


- Special RAL colour
- Antimicrobial paint
- 3000K or 6500K LED light engine
- CRI90 LED light engine
- Stainless steel frame
- Deglaring lens: LG7 compliant, providing <math><1500\text{cd}/\text{m}^2</math>. Replace 'TGS' suffix with: 'CPL' Deglaring lens+clear polycarbonate/ 'TGL' Deglaring lens+toughened glass
- Satin polycarbonate diffuser only, available. Replace 'TGS' suffix with 'S'

Options available on request, contact sales

PHOTOMETRY

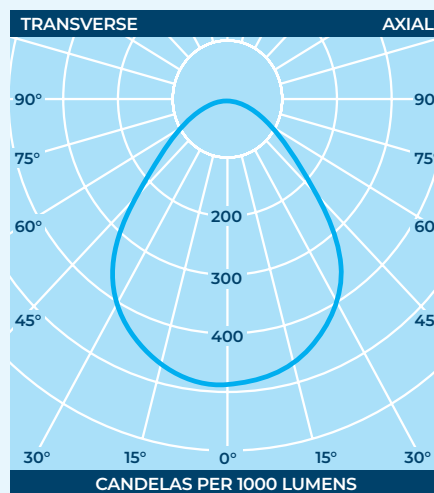


LG7 ENABLING AND CLEAR TOUGHENED GLASS

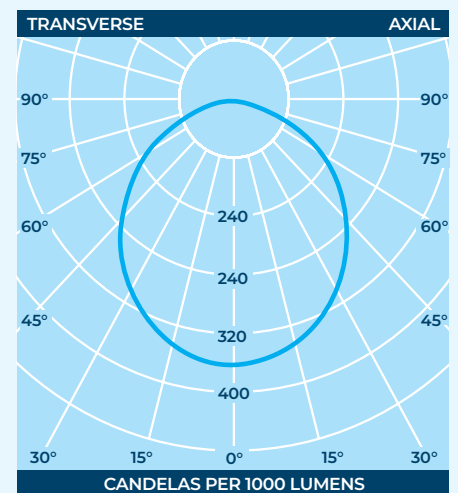


SATIN AND CLEAR TOUGHENED GLASS





Load bearing ceiling panel 60mm up to 200mm

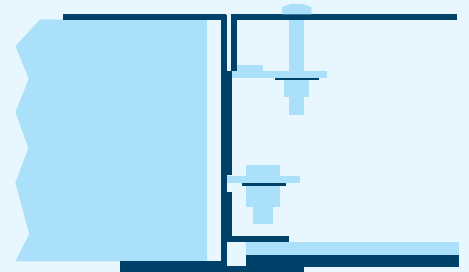


NOTE: The Zeta RA integrates in to the ceiling panel to maintain the working platform in the void space.

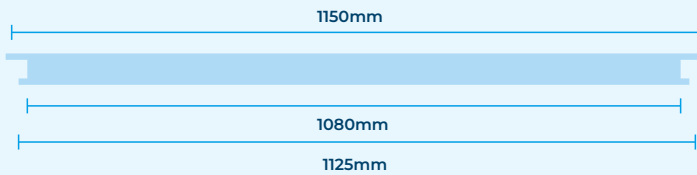

60mm minimum

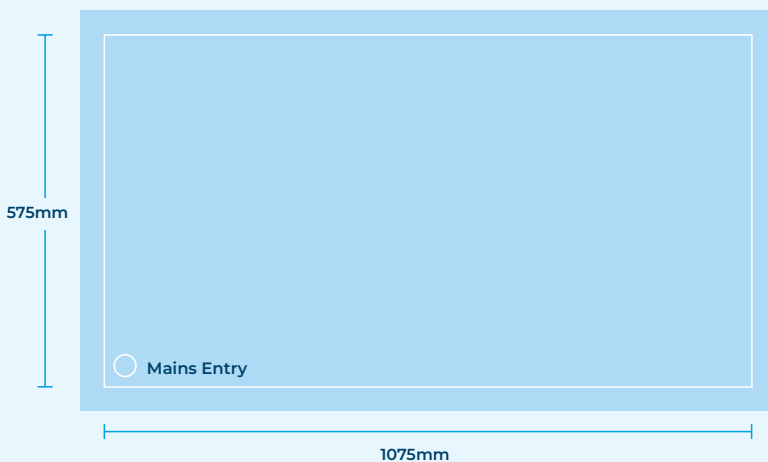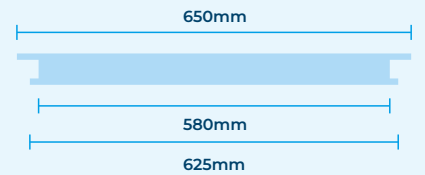

Cut Aperture:
1090x590mm

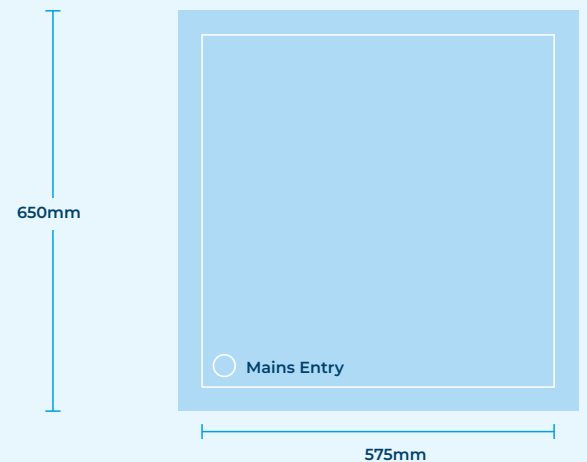

Cut Aperture:
590x590mm

WATTAGE	CAT. NO.	CEILING THICKNESS	NOMINAL SIZE	CUT APERTURE	LUMENS	LL/CW	APROX. kg
30	ZETARA2226WLED4TGS	60mm	600 mm x 600 mm	590 mm x 590 mm	3639	123	17.0
43	ZETARA2238WLED4TGS				5264	122	
51	ZETARA2245WLED4TGS				6198	121	
63	ZETARA2254WLED4TGS				7428	118	
74	ZETARA2268WLED4TGS				8928	121	
59	ZETARA4252WLED4TGS	60mm	1200mm x 600 mm	1090 mm x 590 mm	7278	123	30.0
86	ZETARA4276WLED4TGS				10528	122	
103	ZETARA4290WLED4TGS				12396	121	
125	ZETARA42108WLED4TGS				14856	118	
30	ZETARA2226WLED4TGL	60mm	600 mm x 600 mm	590 mm x 590 mm	3630	124	17.0
43	ZETARA2238WLED4TGL				5268	122	
51	ZETARA2245WLED4TGL				6209	121	
63	ZETARA2254WLED4TGL				7567	121	
74	ZETARA2268WLED4TGL				8786	119	
59	ZETARA4252WLED4TGL	60mm	1200mm x 600 mm	1090 mm x 590 mm	7260	124	30.0
86	ZETARA4276WLED4TGL				10536	122	
103	ZETARA4290WLED4TGL				12418	121	
125	ZETARA42108WLED4TGL				15134	121	

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K-L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>87%
REPLACEABLE	YES
POWER FACTOR	>0.9
ENERGY EFFICIENCY CLASSIFICATION	B
LL/CW	123.5

CONTROLS OPTIONS - suffix catalogue number with:
DALI-DIM - DALI dimmable / **SSCAN** - SmartScan
 e.g. **ZETARA2238WLED4TGS+DALI-DIM**

EMERGENCY OPTIONS - suffix catalogue number with:
EM - Standard 3 hour integral / **EM-ST** - Emergency Self-test
 3 hour integral / **DALI-EM** - DALI 3 hour integral / **SSCAN-EM**
 - SmartScan 3 hour integral
 e.g. **ZETARA2238WLED4TGS+EM**

CEILING THICKNESS - Standard is 60mm. Please note the thickness of the ceiling panel as a suffix to the product code
 e.g. 38W option with 150mm ceiling:
ZETARA2238WLED4TGS+150MM

**All iterations of integral emergency not available in this luminaire variant.

*Figures rounded to the nearest whole number.