

FS209D class 100 | ISO14664 class 5

Recessed IP65 slimline exit sign designed for clean area applications, screwless front access for cleanliness, maintenance and ease of installation.



Stainless Steel



White RAL9010



Hospitals



Pharmacies



Laboratories



Pharmaceutical production



Electronics manufacturing



Semiconductor manufacturing



Food prep. manufacturing

## FEATURES

- Screwless fix diffuser
- IP65 front
- Slim 45mm recessing depth and a 51mm total depth for easy installation into cleanroom panels and plasterboard
- ISO7010 screen printed legends
- 30m viewing distance
- Removable LED platform for improved sustainability and longer life cycle

## OPTIONS

- 316L Stainless steel frame + SSF
- Toughened glass panel + TGS\*
- Special RAL colour\*\*
- Antimicrobial paint + Antimic\*\*

## EMERGENCY\*\*\*

- 3 hour maintained as standard
- Self-test + EM ST
- DALI EM Pro + DALI EM
- SmartScan + SSCAN EM

## FINISHES

RAL9010



Stainless Steel



3mm Polycarbonate diffuser legend



\* TGS 4mm thick float glass: Thermally toughened in accordance with BS3193 and BS EN 60598-2-3 sub clause 3.6.5. \*\*Available on request, contact sales.\*\*\*Central battery, contact sales.

SmartScan Wireless Standards Compliance: Europe: EN 300 220-1 V2.4.1 / EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724.



LED



MAINTAINED



WEIGHT KG



SOLISLM

3hr maintained with standard self-contained emergency control gear and ISO7010 **Left arrow legend**



SOLISRM

3hr maintained with standard self-contained emergency control gear and ISO7010 **Right arrow legend**



SOLISDM

3hr maintained with standard self-contained emergency control gear and ISO7010 **Down arrow legend**



SOLISUM

3hr maintained with standard self-contained emergency control gear and ISO7010 **Up arrow legend**

Euro legend available on request.




### TECH & COMPLIANCE

- UKCA and CE Marked
- Patch illuminance conforms to BS EN60598-1
- Input voltage 230v
- NiMH Battery

### CONSTRUCTION

- Zinc plated steel body
- Zinc plated steel frame with welded and finished corners
- Polyester powder coated body and frame
- Polycarbonate fire-retardant diffuser, TP(a)
- EPDM closed cell gasket
- M20 side mounted cable entry on left side of housing
- White RAL9010

Screwless fix IP65 front legend frame

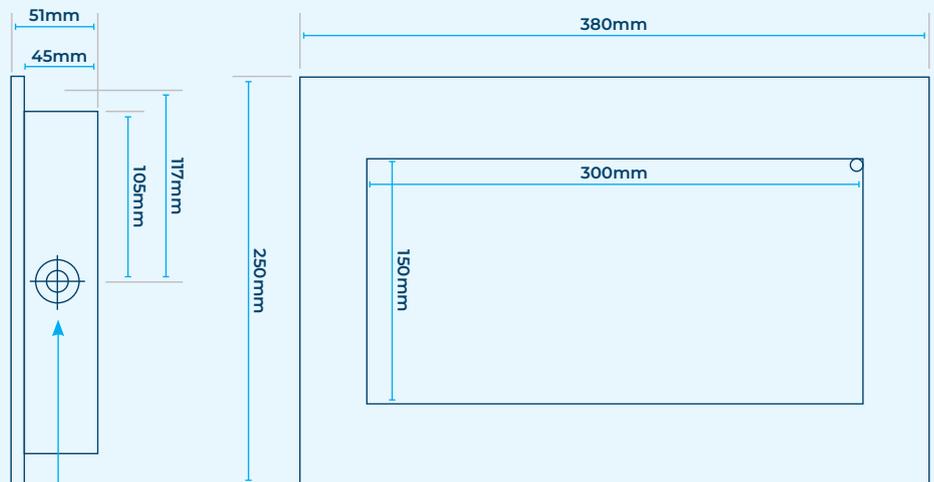

20mm cable entry on left side only

Rear dimensions: 342mm x 210mm  
Cut out dimensions: 350mm x 215mm

ENERGY EFFICIENCY CLASSIFICATION B