

Surface or suspension-mounted lowbay luminaire with front access design, IP65 rated for dust and water protection. Built for bus and rail depots, general-purpose warehousing, and other indoor applications up to 15 metres, providing reliable general illumination.



Mounting / Suspension bracket with BESA pattern



Warehousing



Factories



Maintenance
Depots

FEATURES

- Fixed output, 4000K, CRI80 as standard
- IP65
- Two diffuser options
 - S' Satin polycarbonate
 - LP' low glare carbonate
- 1m fitted free end flex fitted as standard
- Removable LED platform for improved sustainability and longer life cycle

CONSTRUCTION

- Zinc plated surface mounted steel body
- Polyester powder coated body and frame
- Polycarbonate fire-retardant diffuser, TP(a)
- White EPDM closed cell gaskets

OPTIONS

- Special RAL colour
- Highbay integral sensor for daylight and PIR up to 15m "+SENSOR"
- Emergency Options, 3 hour integral
- Dedicated battery compartment positioned at the rear of the luminaire
- Standard "+EM", Self-test "+ST-EM" & DALI "+DALI EM"

FINISHES


RAL9016
White






DIMENSIONS

IN MM

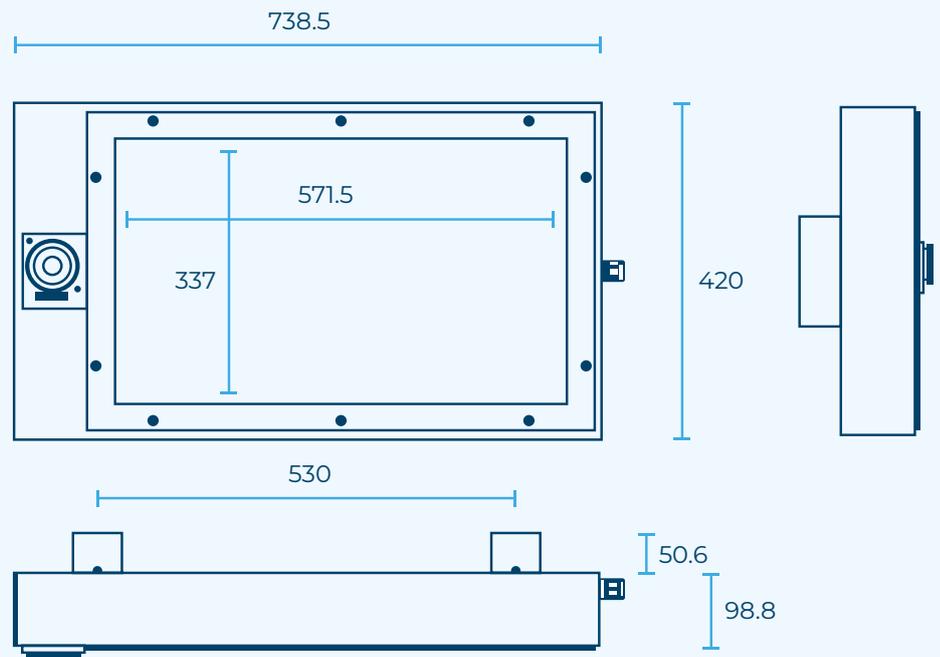




SATIN POLAR CURVE

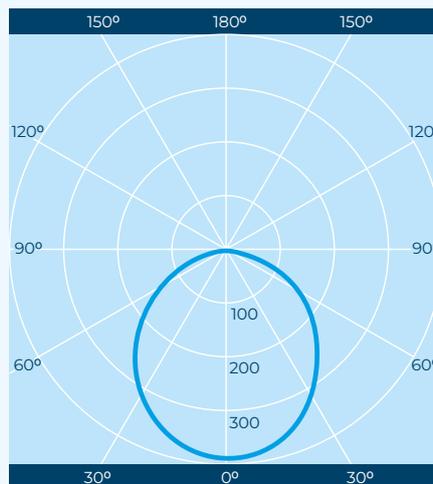

CLEAR POLYCARBONATE & LENSES

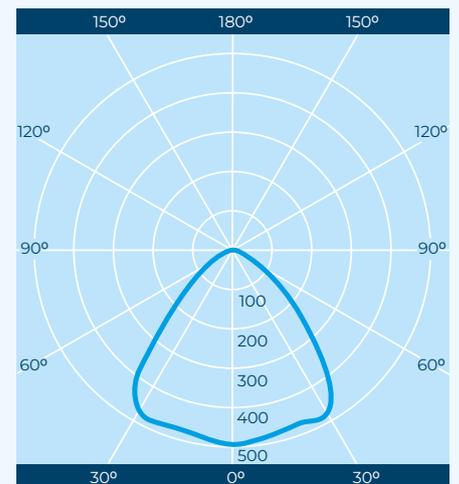

SOLBAY RANGE

WATTAGE	CAT. NO.	NOMINAL SIZE	LUMENS	APPROX. kg
84W	SB74101S	740mm x 420mm	10114	11.0
100W	SB74120S		12040	
113W	SB74136S		13607	
78W	SB74100LP		10007	
94W	SB74120LP		12060	
113W	SB74145LP		14505	

